



LEFT SIDE COMPARTMENTATION				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	ROLL-UP	37"w X 56 7/8"h	43"w X 66"h X 27 1/4"d	42.2 CU. FT.
L2	ROLL-UP	57"w X 27 5/8"h	61 1/2"w X 36 1/2"h X 27 1/4"d	32.1 CU. FT.
L3	ROLL-UP	50"w X 56 7/8"h	53 1/2"w X 66"h X 27 1/4"d	52.5 CU. FT.
H1	LIFT-UP		162"L X 26"H X 21"W	51.1 CU. FT.

RIGHT SIDE COMPARTMENTATION				
COMPT	OPENING DIMENSIONS INSIDE DIMENSIONS		INSIDE DIMENSIONS	
R1	ROLL-UP	37"w X 56 7/8"h	43"w X 66"h X 27 1/4"d (16"d upper)	33.7 CU. FT.
R2	ROLL-UP	57"w X 27 5/8"h	61 1/2"w X 36 1/2"h X 16"d	18.6 CU. FT.
R3	ROLL-UP	50"w X 56 7/8"h	53 1/2"w X 66"h X 27 1/4"d (16"d upper)	41.6 CU. FT.
H2	LIFT-UP		162"L X 26"H X 21"W	51.1 CU. FT.

REAR STEP COMPARTMENTS				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	
A1	ROLL-UP	37 1/2"w X 31"h	40"h X 40"w X 30 1/2"d	27 CU. FT.

TOTAL STORAGE: 349.9 CU.FT.

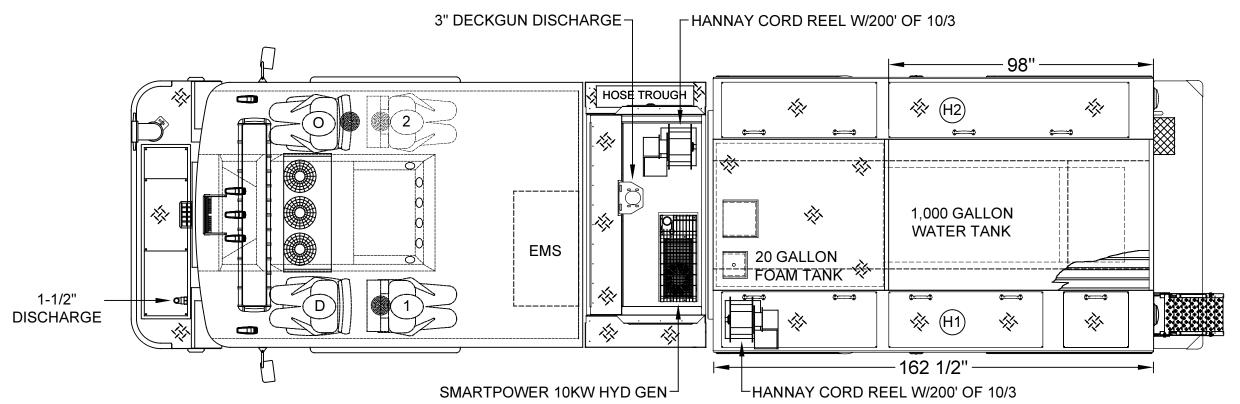

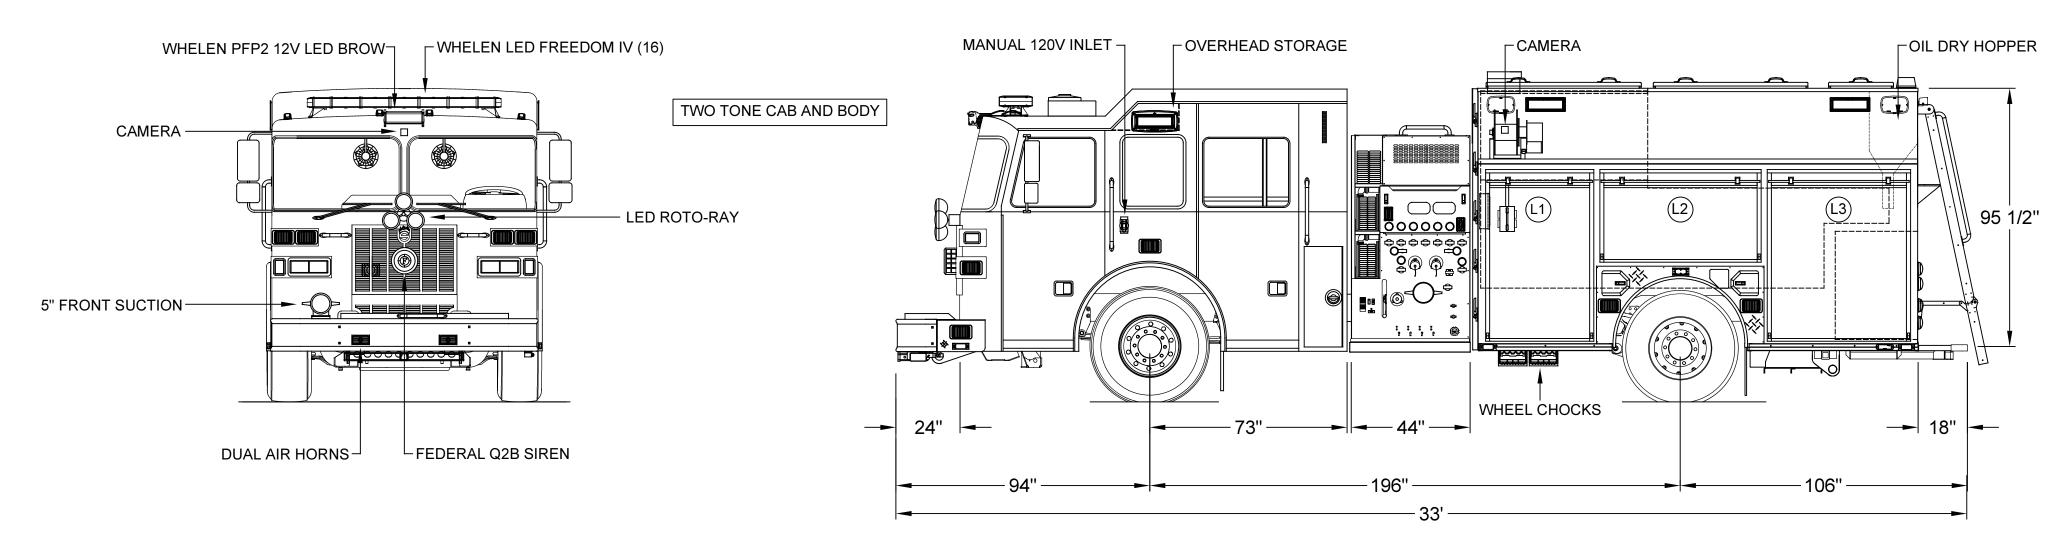

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR	CUSTOMER APPROVAL	I POST PRODUCTION REVISION TO REFLECT FINAL PRODUCT	RM	04/10/18	DRAWN BY:	yesters,
DEVIATIONS DURING CONSTRUCTION.		H DEFROST FANS ADDED TO THE INTERIOR WINDSHIELD	RM	01/19/18	R.MILLER SITPHF	SIITPHEN
IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE	NAME:	G SEVERAL UPDATES AND CLARIFICATIONS - PLEASE SEE SO REVISION EMAIL OR COMPONENT REPORT ATTACHED	RM	12/20/17	DATE: 06/13/17	JEROME TOWNSHIP FIRE DEPARTMENT
SUTPHEN SPECIFICATIONS SHALL PREVAIL.	TITLE:	F DRIVER'S SIDE HATCH COMPARTMENTS FIXED ON DWG TO SHOW QTY. (3)	RM	11/20/17	MFG. FACILITY:	PLAIN CITY, OH
DRAWING IS FOR REFERENCE ONLY. SOME ITEMS	DATE:	REV. DESCRIPTION	BY	DATE	DUBLIN	CUSTOM PUMPER - S6 BODY
PROPOSED MAY NOT BE SHOWN OR NOTED.		THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.				DWG. NO.: HS-6081